

2001 E55 Security Shutter

Applications

High security domestic & commercial sites, up to 16m².
Punched (V55) slats can be incorporated as required for full or partial vision. The V55 also offers polycarbonate inserts to infill the punched section, increasing the security and thermal insulation properties of the vision profile shutter.

Curtain Slat

Double skinned extruded aluminium. The shutter may be powder coated to any RAL / BS colour as standard.

Blind Surface	55mm
Weight per m²	8kg
Maximum Width	5400mm
Maximum Surface	16m²

Enclosure

Manufactured from roll formed aluminium with a stove-enamelled finish in two sections with a 45° chamfered lid. Circular housing option.
End caps are pressure-moulded aluminium alloy.
Powder coated to any RAL / BS colour.

Shutter Height (mm)	Box Size (mm)
1500	180
1800	205
2900	250

Guide Channels / Bottom Slat



Bottom slat of extruded aluminium with weather seal.

Guide channel depth is 75mm or 85mm.
Powder coated to any RAL / BS colour.

Operation


Electric: Single phase tubular motor & wall switch as standard.
Numerous options such as group or remote control etc. Manual override facility as required.

Note: Manual operation is available but not common for the E55 profile as the large areas covered by the shutter implicate a heavy shutter curtain.

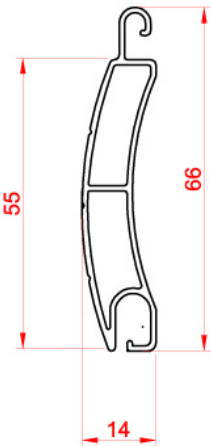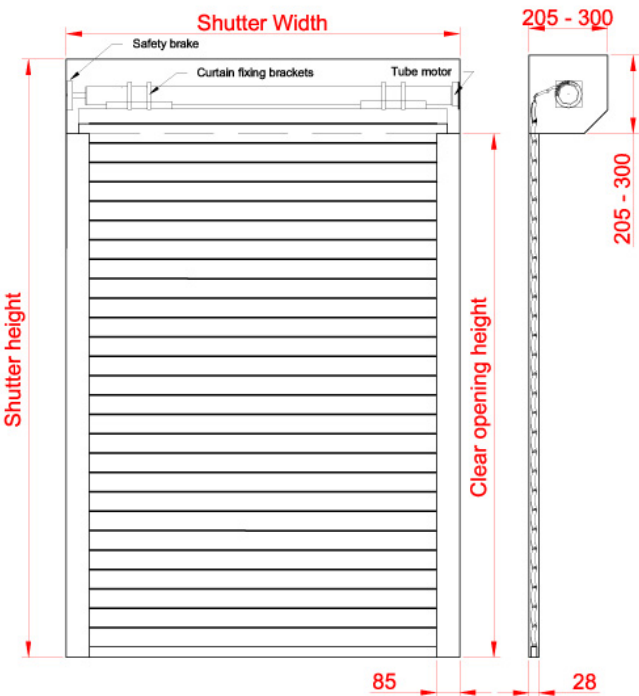

Face Fix

Plan View

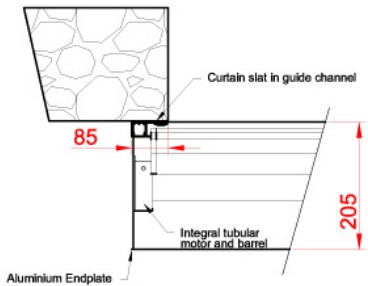

Reveal Fix

Plan View

