

2001 E77 Elite Shutter / 2001 V77 Elite Vision Shutter

Applications

High security commercial sites & shopfront applications, up to 25M². The E77 & V77 Elite has been tested by the Loss Prevention Certification Board, and awarded "Secured By Design" status. The shutter is tested to LPS1175 (6.0) and is security rated at SR2.

Punched (V77) profile slats can be incorporated as required for full or partial vision. The V77 Elite must have polycarbonate inserts to infill the punched section. The shutter must be face fixed, internally.

Curtain Slat

Double skinned extruded aluminium.

Standard colours: Any RAL or BS colour as standard.

Blind Surface:	77mm
Weight per m ²	8.5kg
Maximum Opening Width:	5000mm
Maximum Opening Height:	5000mm
Maximum Surface:	25m ²

Enclosure

Manufactured from roll formed aluminium with a stove-enamelled finish.

End caps are pressure moulded aluminium alloy.

Standard colours: full range of BS and RAL colours as standard.

Shutter height (mm)	Box Size (up to mm)
------------------------	------------------------

2700	300
4000	360
5000	400

Note: a table of table of permitted heights must be observed when surveying.

Guide Channels / Bottom Slat

Extruded aluminium bottom slat with EPDM weather seal.



Guide channels with brush infill, and channel depth of 150mm; must be fitted 30mm from the opening, giving 180mm from opening edge to back of guide.

Standard colours: full range of BS / RAL colours as standard.

Operation


Electric: Single phase tubular motor & wall switch as standard.

Numerous options such as group or remote control etc. Manual override facility as required.

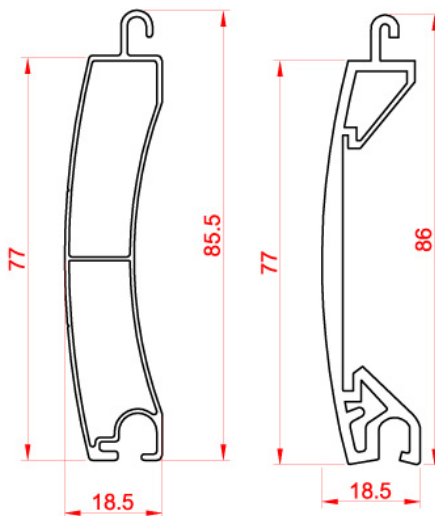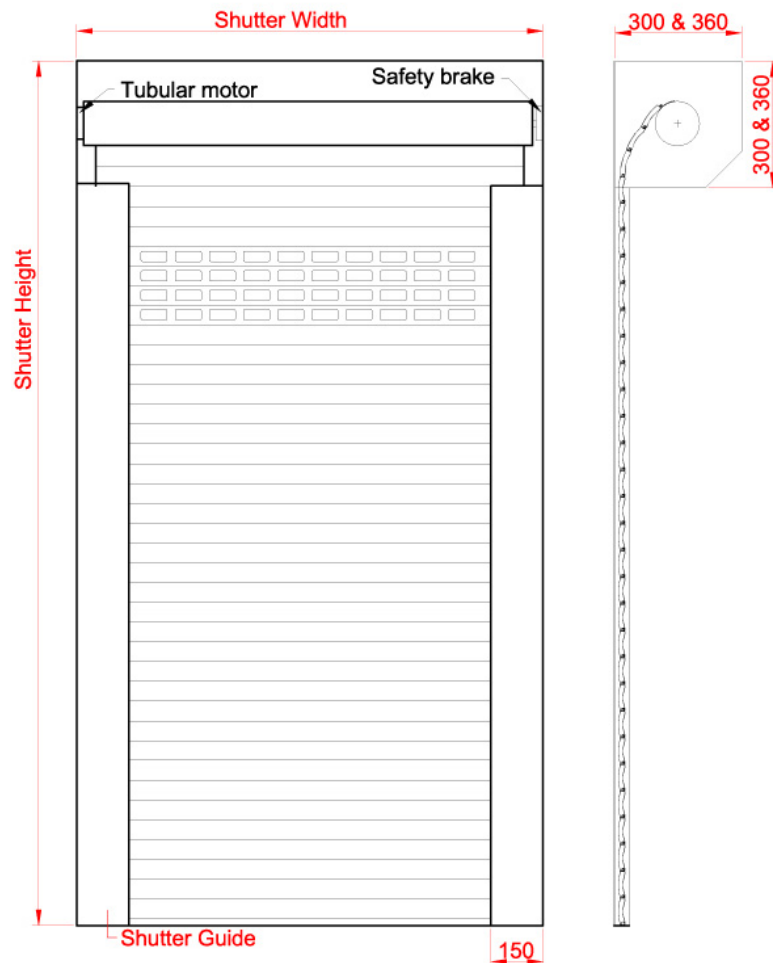

Face Fix

The E77 & V77 Elite must be face fixed, either to brick, block, steel section, or aluminium box section. Approved fixings and installation instructions are supplied with the shutter.

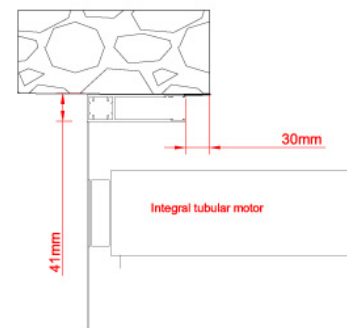

RTF 150 Guide

